

### 規格：

- IP65 防水線圈
- 連續循環，100% ED.
- 防爆等級：EExm II T4 PTB認證

### 電力消耗：



線圈功率	2	2E	3	4	3E
AC(VA)	6.9	8.0	5.7	19.5	9.2
DC(W)	6.2	6.8	5.2	15.0	10.0

### 尺寸：

型號 記號 尺寸mm	MGD							MGD-F						
	10	15	20	25	32	40	45	50	25	32	40	45	50	
A	68.3	72.7	75.5	91.0	97.5				138	155	155	175	175	
B	81.3	88.7	95	119	132				125	135	140	140	155	
C	64	80	90	102	122				138	159	161	168	175	
D	42	51	61	76	95				-	-	-	-	-	
E	22	28	34	-	-				-	-	-	-	-	
重量 (Kg)	線圈 2	0.47	0.45	0.70	0.90	1.98	1.67	3.50	2.86	3.22	5.33	4.93	6.76	6.98
	線圈 2E	0.78	0.75	1.00	1.20	2.29	1.98	3.80	3.17	3.52	5.64	5.24	7.06	7.29
	線圈 3	0.51	0.48	0.74	0.94	2.02	1.71	3.54	2.90	3.26	5.37	4.97	6.80	7.02
	線圈 4	0.60	0.57	0.83	1.03	2.11	1.80	3.62	2.98	3.63	5.75	5.35	7.17	7.40
	線圈 3E	0.89	0.86	1.12	1.32	2.40	2.09	3.91	3.28	3.33	5.46	5.06	6.88	7.10

### 訂購代號：

**MGD-25-N-3-D-F-□-AC110**

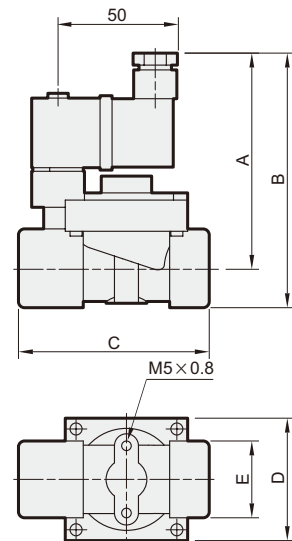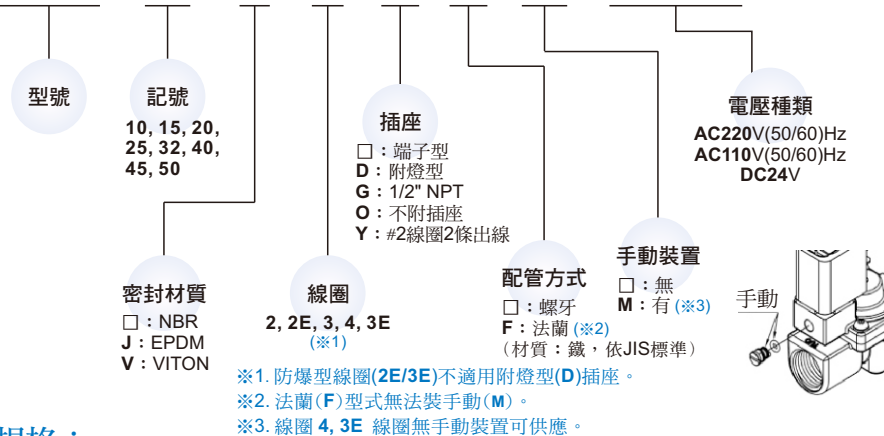

### 規格：

MGD：(鍛造銅閥體，常閉型) 適用流體：空氣、水、瓦斯..等																				
記號 (配管口徑) G	密封環 材質	線圈	節流 口徑 (mm)	溫度℃					使用壓力(0.3~ bar)						CV值					
				線圈2		線圈3/2E		線圈4/3E		線圈2		線圈2E		線圈3		線圈4		線圈3E		
				N.J.V	N	J.V	N	J.V	AC	DC	AC	DC	AC	DC		AC	DC	AC	DC	
10(3/8)	N J V	2	15						10	10	16	15	16	16	-	-	-	16	2.0	
15(1/2)									10	10	14	13	16	16	-	-	-	16	2.5	
20(3/4)		2E	20						10	10	12	10	16	16	-	-	16	16	5.2	
25(1)			25	-5	-5	-5	-5	-5	10	10	12	10	16	16	-	-	16	16	8.5	
32(1-1/4)		3	3	33	60	60	100	60	145	10	9	10	8	14	13	16	16	16	16	16
40(1-1/2)					60	60	100	60	145	10	9	10	8	14	13	16	16	16	16	16
45(1-1/2)		4	4	44						8	5	8	5	12	10	16	16	16	16	26
50(2)												8	5	8	5	12	10	16	16	16

\* 線圈3L表低電力消耗，線圈3H表高電力消耗使用。

### 法蘭：

